
TOSCA LED 0850 SKU 1157003







PRODUCT SPECIFICATION

GENERAL


FINISH:	Polished Chrome	CABLE LENGTH:	Not Applicable
MAIN MATERIAL:	Metal - Zinc	GROSS WEIGHT:	1.02 (kg)
DIMENSIONS:	H:45mm W:200mm D:43mm	CLASS:	CE (Class I)
INSTALLATION ORIENTATION:	Wall Mount - Horizontal	IP RATING:	IP20
CUT OUT HOLE:	Not Applicable	BATHROOM ZONE:	Zone 3
RECESS DEPTH:	Not Applicable	VOLTAGE:	Mains 230V
FIRE RATING:	Not Applicable	PRODUCT F MARK:	Suitable for mounting on flammable material
LAMP			
LIGHT SOURCE:	High-Power LED	MACADAM ELIPSE:	3-Step
MAXIMUM WATTAGE:	1W	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	Not Applicable	BEAM ANGLE:	25.5 (Degrees)
LAMP INCLUDED?	Yes (Integral)	TILT ADJUSTMENT ANGLE:	180 (Degrees)
LUMINOUS FLUX:	61.13 (lm)	ROTATION ADJUSTMENT ANGLE:	135 (Degrees)
COLOUR TEMP:	2700 (K)	AVERAGE LIFESPAN:	60,000 (Hrs)
CRI:	80	L70:	To Be Advised
R9:	To Be Advised		
ELECTRICAL			
SWITCHED:	Yes	SUPPLY FREQUENCY:	50/60 (Hz)
DIMMABLE:	No	DRIVER / BALLAST VOLTAGE:	100-240 (V)
DIMMING METHOD:	Not Applicable	DRIVER AVERAGE LIFESPAN:	30,000 (Hrs)
DRIVER OUTPUT CURRENT:	350 (mA)	EFFICACY:	27.41 (lm/W)
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER/BALLAST INCLUDED?	Yes (Integral)
ADDITIONAL INFOR	MATION		C

ADDITIONAL INFORMATION



BOX QUANTITY X15

PRODUCT ELEVATIONS

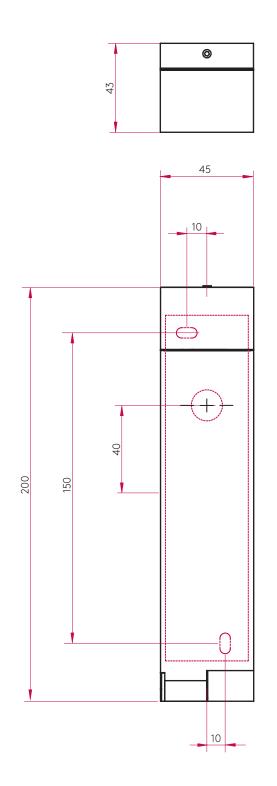

T: +44 (0) 1279 427001

sales@astrolighting.com

www.astrolighting.com